

Stopseal® Batt is an Ablative Coated stonewool board used to reinstate the fire resistance performance of wall and floor constructions where apertures are penetrated by single or multiple services.

The Stopseal® Batt is tested and Certified as part the FSi Fire Stopping range. The Stopseal® Batt can be installed across a variety services and substrates including,

- Flexible and Rigid Walls
- Rigid Floors
- Multi-Service penetrations
- Blank Openings
- Head of Walls

**Areas of Use:**

- To reinstate fire resistance through walls and floors
- Multi-service penetrations
- Prevention of air leakage
- Maintains Acoustic performance
- Assumed working life 30 years
- For internal use

**Advantages:**

- Highly flexible, high performance flexible ablative coating, making cutting and install easy
- Lightweight and simple to install
- Tested practically, with the installer in mind.
- Provides smoke seal.
- Manufactured and tested alongside the entire FSi Fire Stopping range in the UK.

**Certification & Testing:**

- Testing in accordance with EN1366-3:2009 – Fire Resistance
- Classified in accordance with EN13501-2 – Fire Resistance
- CE Marked – ETA 14-0005
- Tested in accordance with ASTM E2923:14 – Longevity of Fire Stop Materials
- Certifire Accreditation – CF513
- ULEU Accreditation
- UAE Certificate of Compliance
- Tested in accordance with EN10140-2:2010 – Airborne Sound
- Tested in accordance with EN1026:2000 – Air Permeability



**Certifications**



UAE Certificate of Compliance

دەرجەت بەرکەتلىك كېڭەيتىش كىتابىدا تىزىلغان  
ئىشلىتىش ئورنىدا بولغاندا، ئۇنىڭغا  
ئىشلىتىش ئورنىدا بولغاندا، ئۇنىڭغا  
ئىشلىتىش ئورنىدا بولغاندا، ئۇنىڭغا  
ئىشلىتىش ئورنىدا بولغاندا، ئۇنىڭغا



ETA 14-0005

CE-1121-CPR-JA5021





APPROVED  
CF513



Please refer to FSi Technical Data Sheets and Technical Manual for more information

**Overview**

Description	Result
Longevity of Fire Stop Materials - ASTM E2923: 14	30 Years
Size	1200 x 600 x 50mm & 1200 x 600 x 60mm
Density of Stone	140kg/m <sup>3</sup>
Density of Ablative Coating	1.35g/cm <sup>3</sup>
Colour	White, Grey, Black, Red
Packaging	Green FSi printed bag
Product Code	T1250DPBI - 50mm, T1200BI - 60mm
Associated Products	Pyrocoustic Sealant, Pyropro HPE Sealant, PipeBloc PCP Collar, PipeBloc EL Wrap
Storage Conditions	Dry conditions between +5 to +40°C
Shelf Life	N/A if stored in accordance with storage conditions

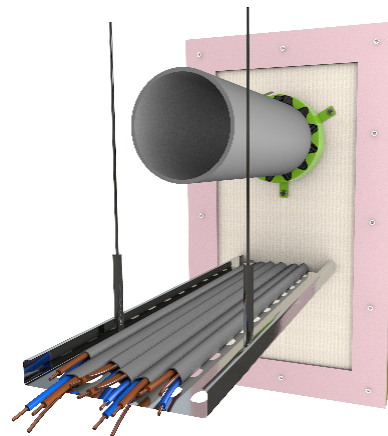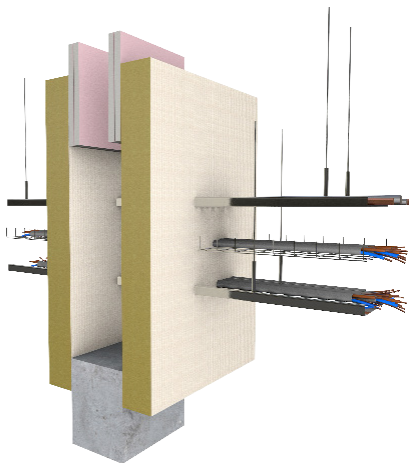

FSi has Technical Representatives who provide assistance in the selection and specification of FSi products. For more information, specification and technical advice please call our Head Office on Tel: +44 (0) 1530 515130. Guarantee / Warranty: FSi products are manufactured to rigid standards of quality. Any product which has been applied in accordance with FSi's written instructions and in any application recommended by FSi, but which is proved to be defective in product quality, will be replaced free of charge. No liability can be accepted for the information provided in this document although it is published in good faith and believed to be correct. FSi Limited reserves the right to alter product specifications without prior notice, in line with our Company policy of continuous development and improvement.