


No Sound Series

1703 ACU

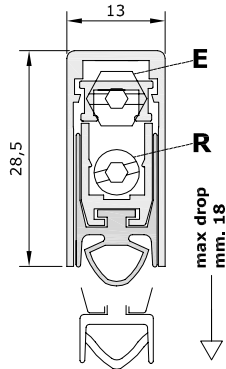

Certified for:

- Sound insulation **50 dB**
- Fire resistance: **60 min.**
- Insulation from smoke **1,45 m³ / h / m - 25 Pa**
- Usage cycles **200.000 cycles**

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

STANDARD ACCESSORIES




Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	

FASTENING SYSTEMS


STANDARD



OPTIONAL



MAIN APPLICATIONS

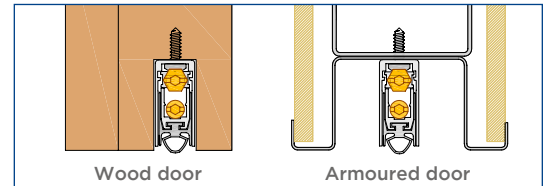

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - high performance tubular silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

• VARIATIONS ON REQUEST

Button: round nylon, square nylon, bevelled nylon.

STANDARD PACKAGING

Cardboard box with 40 pcs + 40 standard accessory packs

OPTIONAL PACKAGING

Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

OPTIONAL ACCESSORIES

Nylon plate



CA101
on smooth frame



CA104
on smooth frame




Fixing brackets in steel and nylon



Colour: steel, brown

Packaging: 20 pcs pack

Insulating nylon plate with silicon gasket

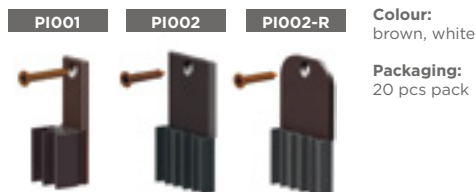

PI002
on smooth frame



PI002
on smooth frame

