








Comax Series 1750


Certified for:

-  Sound insulation
39 dB
-  Usage cycles
200.000 cycles
-  Insulation from smoke
1,12 m³ / h / m - 25 Pa

Protects from:

-  Air
-  Water
-  Light
-  Insects

 Not an obstacle for disabled persons

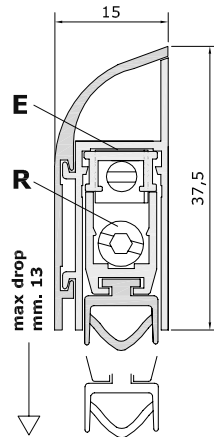


Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	Longer lengths on request
Max shortening (mm) Z	110	100	100	100	100	100	100	100	100	100	Longer lengths on request

FASTENING SYSTEMS



APPLICATIONS

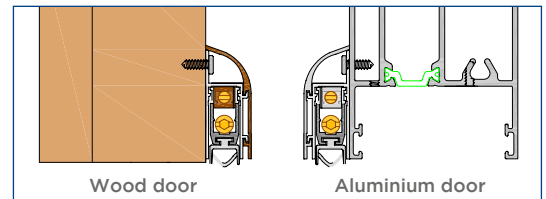

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - anodized or painted, extruded tubular EPDM gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

• **COLOURS** Anodized: bronze, silver.
Painted: white RAL1013, white RAL 9010, brown RAL 8017, black.

• **VARIATIONS ON REQUEST**
Gasket: silicon tubular, brush.

STANDARD PACKAGING

Cardboard box with 10 packages complete with standard accessories and assembly instructions

APPLICATIONS

Wood door



Armoured door



PVC door

